

TEST REPORT


Report Ref.	LEI19072132A Revised		
Date Received	11/07/2019	Date Issued	17/07/2019

Company Name & Address	Camira Fabrics Limited The Watermill Mirfield, WF14 8HE GBR
Contact Name	Luke Russell

Order Number	83A04739
Sample Description	Advantage
Ref / Style Number	Items:
Colour	Nightshade
Batch Number	426592
End Use	Contract Upholstery
Retailer	General

Test	Method	Sample	Result
Martindale Abrasion Resistance	BS EN ISO 12947-2: 1999		See Results

Tests marked (^) in this report have been performed by an approved 3rd party laboratory.
Tests marked (*) in this report are not included in our UKAS scope of accreditation.

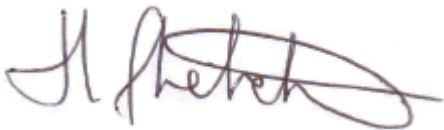

Heather Fletcher
(Jobsheet Team Leader)

Martindale Abrasion Resistance BS EN ISO 12947-2: 1999
Conditioning Parameters: 20°C±2°C & 65% rH±4% rH

		Requirement
Test load:	12 kPa	
Shade Change @ 5,000	4 - 5	
	No fabric breakdown @	
Specimen 1 - No fabric breakdown @	60,000 Revs	
Specimen 2 - No fabric breakdown @	60,000 Revs	
Specimen 3 - No fabric breakdown @	60,000 Revs	
No fabric breakdown Average	>60,000 Revs	

Overall Test Result: See Results
Uncertainty: ±17%

This report is made solely on the basis of your instructions and/or information and materials supplied by you. It is not intended to be a recommendation for any particular course of action. Intertek does not accept a duty of care or any other responsibility to any person other than the Client in respect of this report and only accepts liability to the Client insofar as is expressly contained in the terms and conditions governing Intertek's provision of services to you. Intertek makes no warranties or representations either express or implied with respect to this report save as provided for in those terms and conditions. We have aimed to conduct the Review on a diligent and careful basis and we do not accept any liability to you for any loss arising out of or in connection with this report, in contract, tort, by statute or otherwise, except in the event of our gross negligence or willful misconduct.

The reported expanded uncertainty is based on a standard uncertainty multiplied by a coverage factor of $k = 2$, providing a level of confidence of approximately 95 %. Any Pass/Fail statements do not take into account the Measurement of Uncertainty. The Uncertainty budgets are stated for each Test method, these are for reference, and should be considered when results are close to Specification Limits / Requirements.